

AVAILABLE MOUNTING CONFIGURATIONS

6STX-F FRAME MOUNT
6STX-EM ENGINE MOUNT

OPERATING LEVELS

MIN FLOW	300 GPM	68.1 m ³ /h
MAX FLOW	1680 GPM	381.6 m ³ /h
DISCHARGE SIZE	6"	152 mm
SUCTION SIZE	6"	152 mm
SOLIDS HANDLING	3"	76 mm
MAX RPM	1900 RPM	1900 RPM
SHUT OFF HEAD	170'	51.8 m
BEP HEAD	119'	36.3 m
BEP FLOW	1340 GPM	304.3 m ³ /h
BEP EFFICIENCY	62%	62%

PARTS	STANDARD MATERIAL (ALL IRON)
VOLUTE CASING	DUCTILE IRON, ASTM A536, 65-45-12
IMPELLER	DUCTILE IRON, ASTM A536, 100-70-03
IMPELLER WASHER	416 STAINLESS STEEL, HEAT TREATED
IMPELLER SCREW	304 STAINLESS STEEL
BACKPLATE/BRACKET	DUCTILE IRON, ASTM A536, 65-45-12
WEAR PLATE	MILD STEEL
BEARING FRAME	DUCTILE IRON, ASTM A536, 65-45-12
SHAFT	17-4 PH STAINLESS STEEL
SHAFT SLEEVE	304 STAINLESS STEEL
FASTENERS	GRADE 5 STEEL
MECHANICAL SEAL	SILICON CARBIDE vs. SILICON CARBIDE, TYPE 2



A typical picture of the pump is shown. Please contact Gemstone's Pump Company for further details. All information is approximate and for general guidance only.

Gemstone's self-priming pump, with industry-leading efficiency, runs several percentage points higher than other manufacturers. Features patented Cycloseal[®] backplate and uniquely designed volute for best performance, with a 6" suction and 6" discharge.

- FIVE-YEAR warranty •
- Optional self-cleaning wear plate •
- Modular bearing frame •
- Gemstone's Cycloseal[®] with type 2 seal •
- Dual protection of bearings with external seal leakage monitor (vent to atmosphere)
- Retrofit-able with existing installations

- High-efficiency design
- Oversized oil reservoir for better cooling
- Replaceable shaft sleeve
- Heavy-duty ductile iron construction
- Designed for SAE conversion
- High RPM Capability



AGRICULTURE



FOOD



INDUSTRIAL



MINING



MUNICIPAL



OIL & GAS




REFRIGERATION



RENTAL

6STX - VARIOUS RPM

Performances shown are for S.G. 1.0 60°F water, frame mounted configuration with Cyclo Seal®. Other mounting styles or S.G. may require curve adjustments.	Speed	Impeller Dia.	Style	Volute	Solids Dia.	N _s	Suction	Discharge	No. Vanes
	VARIOUS	12.38"	SEMI-OPEN	SINGLE	3"	1940	6"	6"	2

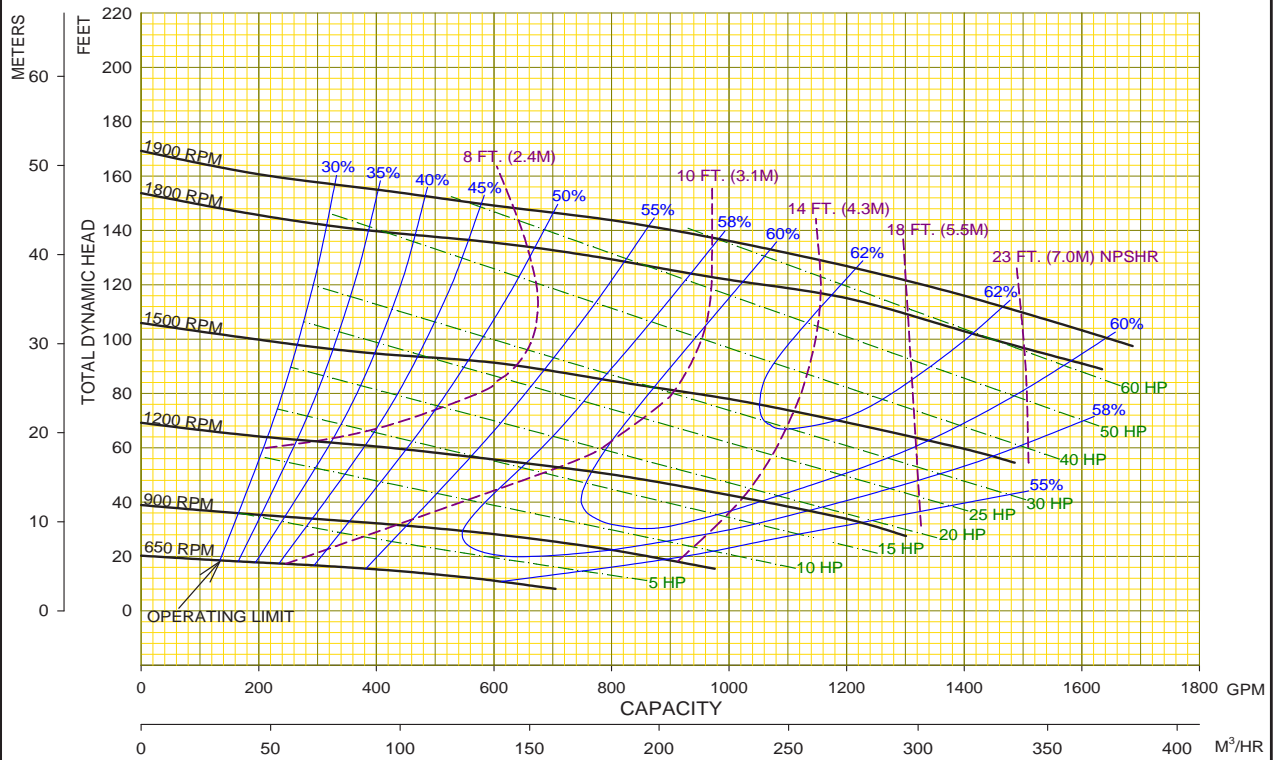

Gemstone Pump Company

05	10/13/14	CTG	MODEL : 6STX
00	04/02/13		TYPE : SELF-PRIMING

CURVE NO: **6STXVA**

